



# KRX MELBOURNE



KRX Melbourne  
Workstations



# KRX MELBOURNE

Commercial  
Furniture Specialists  
for Hospitality

## Get in touch.

 03 6339 2373

 [Sales@krxmelbourne.com](mailto:Sales@krxmelbourne.com)

 [www.krxmelbourne.com](http://www.krxmelbourne.com)



## Who We Are

At KRX Melbourne, we are more than just furniture suppliers. We are workspace solutionists. Rooted in design excellence and sustainability, our brand delivers functional, modern, and locally supported furniture that transforms everyday offices, co-working spaces, and commercial environments into inspiring places to think, work, and grow.

With a focus on aesthetic innovation, durability, and affordable customisation, we help businesses reflect their brand culture through well-designed interiors.



## What We Do

We design and supply commercial-grade furniture tailored for all types of work environments, including:

-  Corporate Offices

Desks, ergonomic chairs, workstations, and executive suites with built-in cable management and modular flexibility.

-  Coworking Spaces

Multi-use setups that promote collaboration from hot-desking zones to casual breakout furniture.

-  Real Estate & Display Suites

Smart, styled pieces that help present modern lifestyle and professional functionality in leasing or sales environments.

-  Reception & Lounge Areas

Comfortable, statement pieces that balance function and first impressions.

-  Furniture Rental & Fit-Outs

Short-term and long-term rental solutions for projects, pop-ups, and staging needs all delivered with white-glove service and installation.

### WHY CHOOSE US?



45 Days Delivery



Free 3D design  
and CAD service



10 years warranty



One-stop FF&E  
supply chain

# COMPONENT BASED CUSTOMIZED SOLUTIONS



## CUSTOMIZE YOUR COLOR

In addition to the classic black, white, and gray, you can customize desk frames, legs, and feet in almost any specific color.



## DESIGN YOUR FRAME STRUCTURE

Our production presents you the option of all leg designs from square, to rectangle, to round, oval and rounded rectangle tubes, along with our expandable frame with standard or easy assembly options, and our operating system with easily branded handsets. This can be supported further by creating a unique design foot with multiple cable management options.



# INNOVATIVE INTELLIGENCE

## QUICK INSTALLATION DESIGN

Without heavy installation process, KRX Melbourne provides an efficient and stable lifting product, which saves 70% installation time on the basis of the original frame system, and greatly reduces the cost of manual installation of desk.


Option A



Foot Base Connection




Option B

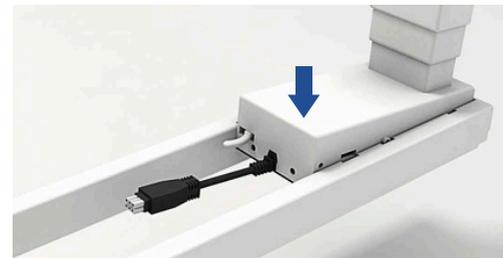

Side Bracket Connection



Single Motor Easy Folding Version

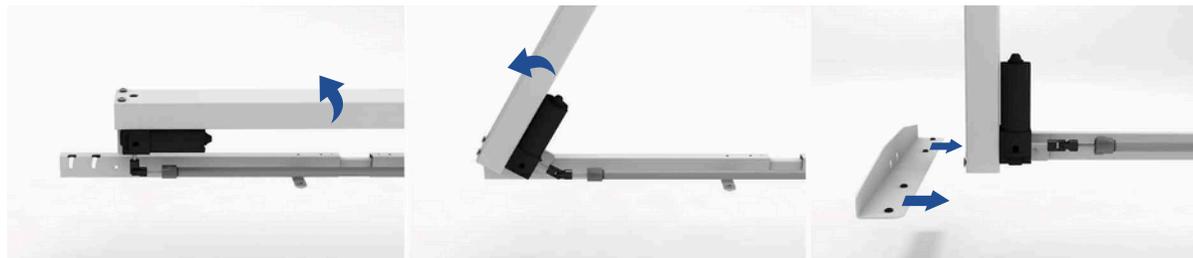

## HIGH STRENGTH LOAD BEARING

Designed for industrial strength, it shows extraordinary bearing capacity - up to 300KG, which firmly supports heavy equipment and tools to ensure efficient and smooth industrial operations.




## HIGH SPEED

The lifting speed of the column is increased from 40mm/s to 80mm/s, and the lifting of the table can be completed in 6 seconds, which can reduce the waiting time and efficiently realize the sitting and standing alternations.



# INNOVATIVE INTELLIGENCE

## SMART BOX

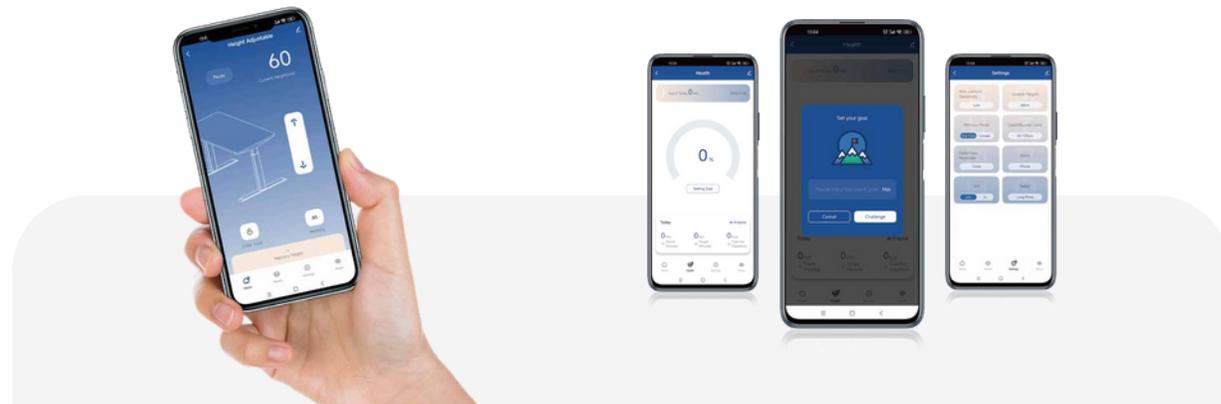

## MOBILE APP CONTROL



WiFi control-Update from Bluetooth. With this application, you can control your office desk and track your health data. The application is currently available for both Android and Apple iOS operating systems.

## VOICE CONTROL



KRX Melbourne integrates the voice recognition system with the desktop control system to truly enable human-product interaction.

## HIGHLY SENSITIVE ANTI-COLLISION

With a highly sensitive anti-collision feature, the desk will stop and retreat when encountering obstacles, to avoid unnecessary damage, contribute to safety protection.



## OTA REMOTE UPGRADE

The latest software updates can be received and installed through the wireless network, which not only optimizes the performance of the hand controller, fixes bugs, but also introduces new features to improve the user experience and convenience.





# Desk Frame

1-leg

Height Range(E1)

575-1225mm

Speed

40mm/s

Height Range(E2)

675-1325mm

Load Capacity

80kg


Height Range(E3)

600-1250mm


Voltage

100V-240V


NT33-E1

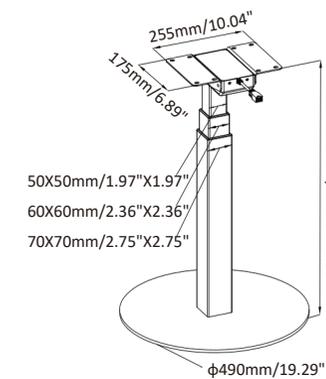

NT33-E2

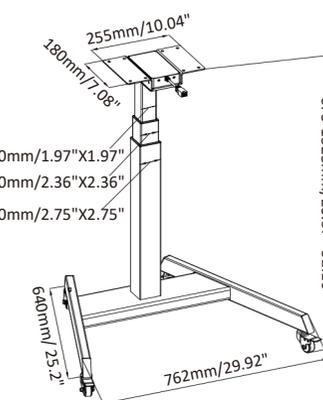


NT33-E3

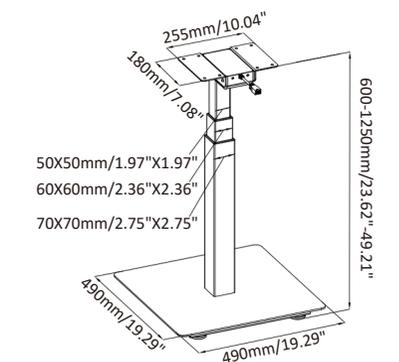

# Desk Frame


2-legs / 2-stage

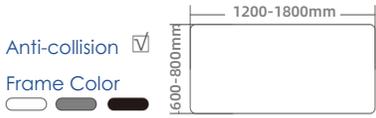

Shape						
Size(mm)	80x50	70x70	91x58	φ70	85x55	90x60
Standard Column	NT33-2AF2	NT33-2BF2	NT33-2CF2	NT33-2DF2	NT33-2FF2	NT33-2HF2
Reversed Column	NT33-2ARF2	NT33-2BRF2	NT33-2CRF2	NT33-2DRF2	NT33-2FRF2	NT33-2HRF2
Height Range(mm)	700-1200	700-1200	700-1200	700-1200	700-1200	700-1200
Width Range(mm)	1010-1750	1010-1750	1010-1750	1010-1750	1010-1750	1010-1750
Speed(mm/s)	30	30	30	30	30	30
Load Capacity(kg)	120	120	120	120	120	120
Electric Control	Advanced control system					

# Desk Frame

2-legs / 3-stage

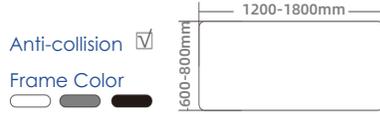

Shape						
Size(mm)	80x50	70x70	91x58	φ70	85x55	90x60
Standard Column	NT33-2AF3	NT33-2BF3	NT33-2CF3	NT33-2DF3	NT33-2FF3	NT33-2HF3A
Reversed Column	NT33-2ARF3	NT33-2BRF3	NT33-2CRF3	NT33-2DRF3	NT33-2FRF3	NT33-2HRF3A
Height Range(mm)	600-1250	600-1250	640-1290	640-1290	600-1250	600-1250
Width Range(mm)	1010-1750	1010-1750	1010-1750	1010-1750	1010-1750	1010-1750
Speed(mm/s)	40	40	40	40	40	40/80
Load Capacity(kg)	120	120	120	120	120	120
Electric Control	Advanced control system					

NT33-2CF2

Height Range  
700-1200mm


Speed  
30mm/s

Stroke  
500mm

Width Range  
1010-1750mm

Load Capacity  
120kg

Voltage  
100V-240V

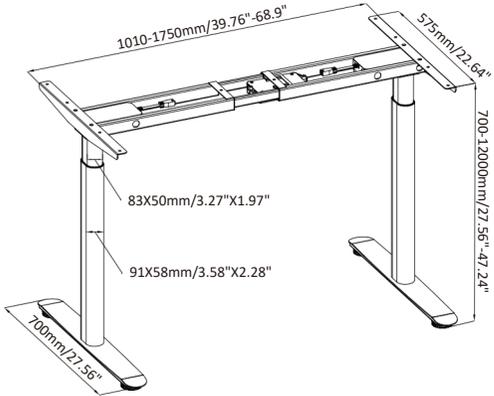

NT33-2BF3

Height Range  
600-1250mm


Speed  
40mm/s

Stroke  
650mm

Width Range  
1010-1750mm


Load Capacity  
120kg

Voltage  
100V-240V

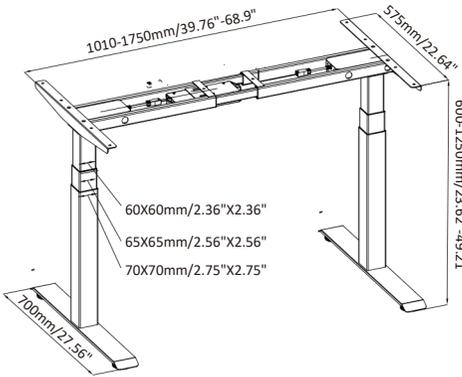

# Desk Frame


3-legs / 2-stage

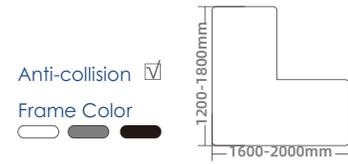

Shape						
Size(mm)	80x50	70x70	91x58	φ70	85x55	90x60
Standard Column	NT33-3AF2	NT33-3BF2	NT33-3CF2	NT33-3DF2	NT33-3FF2	NT33-3HF2
Reversed Column	NT33-3ARF2	NT33-3BRF2	NT33-3CRF2	NT33-3DRF2	NT33-3FRF2	NT33-3HRF2
Height Range(mm)	700-1200	700-1200	700-1200	700-1200	700-1200	700-1200
Width Range(mm)	1010-1750	1010-1750	1010-1750	1010-1750	1010-1750	1010-1750
Speed(mm/s)	30	30	30	30	30	30
Load Capacity(kg)	150	150	150	150	150	150
Electric Control	Advanced control system					

# Desk Frame

3-legs / 3-stage

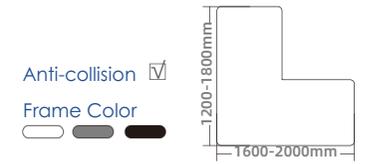

Shape						
Size(mm)	80x50	70x70	91x58	φ70	85x55	90x60
Standard Column	NT33-3AF3-90-120-180	NT33-3BF3-90-120-180	NT33-3CF3-90-120-180	NT33-3DF3-90-120-180	NT33-3FF3-90-120-180	NT33-3HF3A-90-120-180
Reversed Column	NT33-3ARF3-90-120-180	NT33-3BRF3-90-120-180	NT33-3CRF3-90-120-180	NT33-3DRF3-90-120-180	NT33-3FRF3-90-120-180	NT33-3HRF3A-90-120-180
Height Range(mm)	600-1250	600-1250	640-1290	640-1290	600-1250	600-1250
Width Range(mm)	1010-1750	1010-1750	1010-1750	1010-1750	1010-1750	1010-1750
Speed(mm/s)	40	40	40	40	40	40
Load Capacity(kg)	150	150	150	150	150	150
Electric Control	Advanced control system					

NT33-3AF2

Height Range

700-1200mm

Speed

30mm/s

Stroke

500mm

Width Range


1010-1750mm

Load Capacity

150kg

Voltage

100V-240V

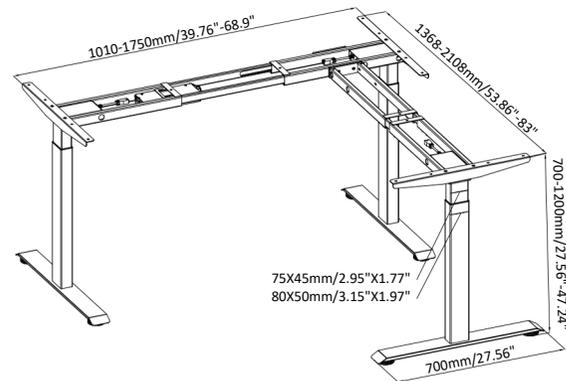

NT33-3AF3-90-120-180

Height Range

600-1250mm

Speed

40mm/s

Stroke

650mm

Width Range


1010-1750mm

Load Capacity

150kg


Voltage

100V-240V

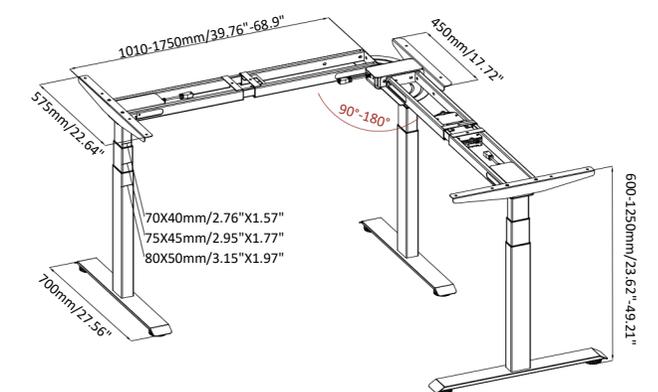

# Desk Frame


4-legs / 2-stage

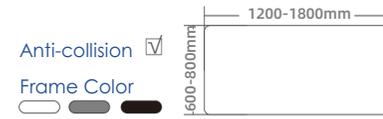

Shape						
Size(mm)	80x50	70x70	91x58	φ70	85x55	90x60
Standard Column	NT33-4AF2	NT33-4BF2	NT33-4CF2	NT33-4DF2	NT33-4FF2	NT33-4HF2
Reversed Column	NT33-4ARF2	NT33-4BRF2	NT33-4CRF2	NT33-4DRF2	NT33-4FRF2	NT33-4HRF2
Height Range(mm)	700-1200	700-1200	700-1200	700-1200	700-1200	700-1200
Width Range(mm)	1010-1750	1010-1750	1010-1750	1010-1750	1010-1750	1010-1750
Speed(mm/s)	30	30	30	30	30	30
Load Capacity(kg)	200	200	200	200	200	200
Electric Control	Advanced control system					

# Desk Frame

4-legs / 3-stage

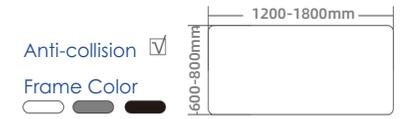

Shape						
Size(mm)	80x50	70x70	91x58	φ70	85x55	90x60
Standard Column	NT33-4AF3	NT33-4BF3	NT33-4CF3	NT33-4DF3	NT33-4FF3	NT33-4HF3A
Reversed Column	NT33-4ARF3	NT33-4BRF3	NT33-4CRF3	NT33-4DRF3	NT33-4FRF3	NT33-4HRF3A
Height Range(mm)	600-1250	600-1250	640-1290	640-1290	600-1250	600-1250
Width Range(mm)	1010-1750	1010-1750	1010-1750	1010-1750	1010-1750	1010-1750
Speed(mm/s)	40	40	40	40	40	40
Load Capacity(kg)	200	200	200	200	200	200
Electric Control	Advanced control system					

NT33-4DF2

Height Range  
700-1200mm


Speed  
30mm/s

Stroke  
500mm

Width Range  
1010-1750mm

Load Capacity  
200kg

Voltage  
100V-240V

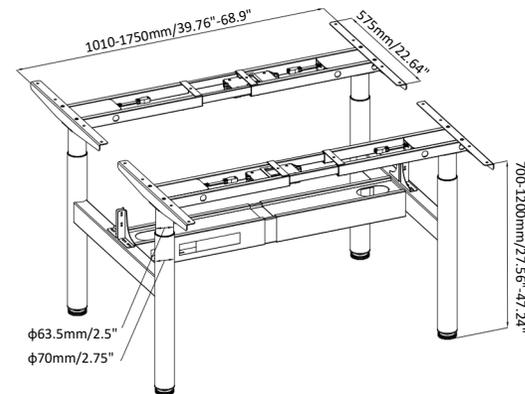

NT33-4CF3

Height Range  
640-1290mm


Speed  
40mm/s

Stroke  
650mm

Width Range  
1010-1750mm


Load Capacity  
200kg

Voltage  
100V-240V

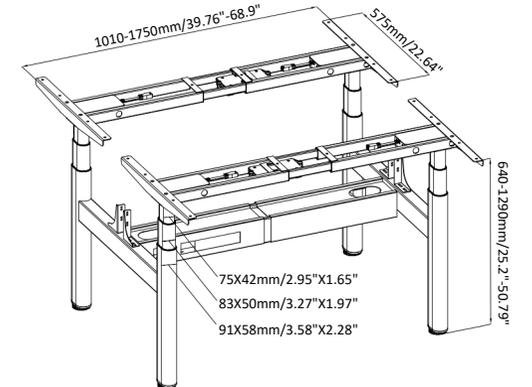

# Workstation

## Modular Design

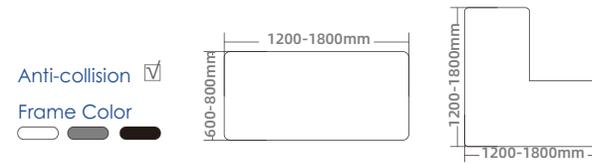

NT33-2HF3A



2-leg

Height Range

600-1250mm

Width Range

1010-1750mm

Speed

40mm/s

Load Capacity


120kg

Stroke

650mm


Voltage

100V-240V

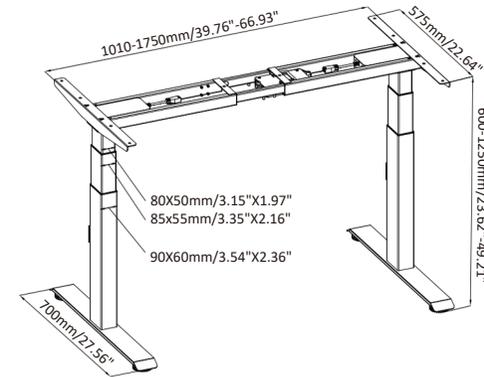

# Workstation

## Modular Design

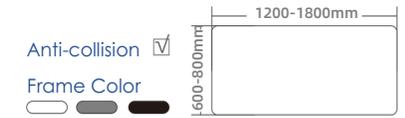

NT33-2HF3A



2-leg with groove

Height Range

600-1250mm

Width Range

1450-1750mm

Speed

40mm/s

Load Capacity


120kg

Stroke

650mm

Voltage

100V-240V

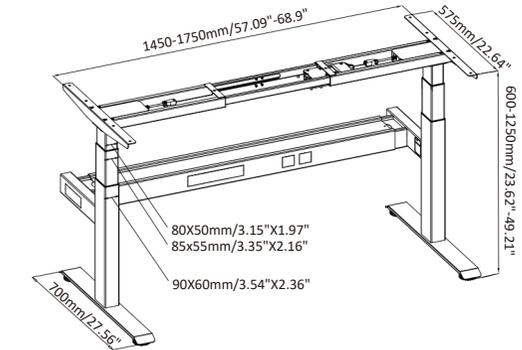

NT33-3HF3A-90



Add one leg transformed from 2-leg to 3-leg

Height Range

600-1250mm

Width Range

1010-1750mm

Speed

40mm/s

Load Capacity


150kg

Stroke

650mm

Voltage

100V-240V

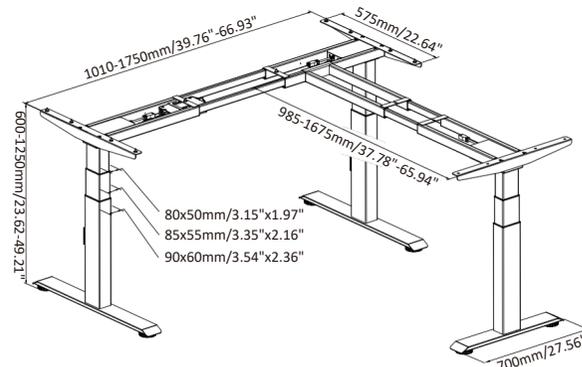

NT33-4HF3A



Add two legs transformed from 2-leg with groove to 4-leg

Height Range

600-1250mm

Width Range

1450-1750mm

Speed

40mm/s

Load Capacity


200kg

Stroke

650mm

Voltage

100V-240V

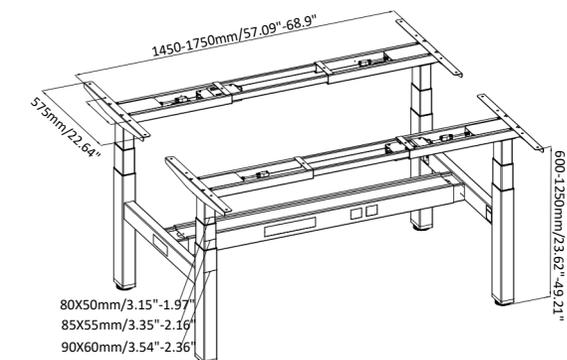




KRX  
MELBOURNE



# Workstation

## Multi-station

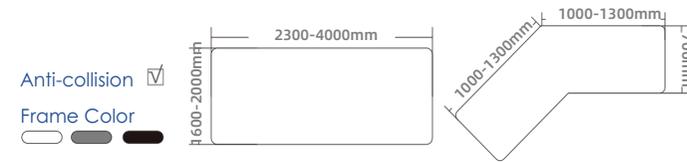

Anti-collision   
 Frame Color

NT33-OB-6DF3

Height Range

645-1295mm

Speed

40mm/s

Stroke

650mm

Width Range



2214-4000mm

Load Capacity

300kg

Voltage

100V-240V

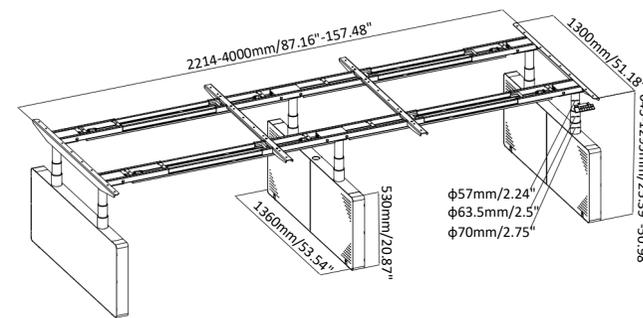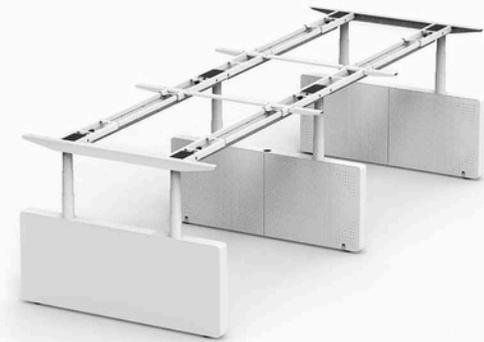

NT33-OB-9DF3

Height Range

635-1285mm

Speed

40mm/s

Stroke

650mm

Width Range


755-1145mm

Load Capacity

150kg/position

Voltage


100V-240V

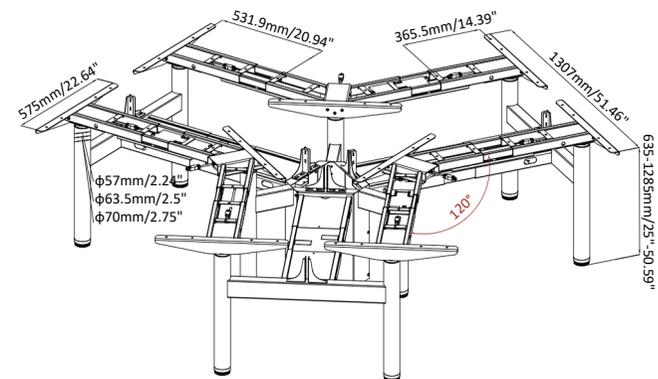

# Workstation

## Multi-station

Anti-collision   
 Frame Color



NT33-OB-12BF3

Height Range

635-1285mm

Speed

40mm/s

Stroke

650mm

Width Range


1010-1750mm/  
1372-2122mm

Load Capacity

150kg/position

Voltage

100V-240V

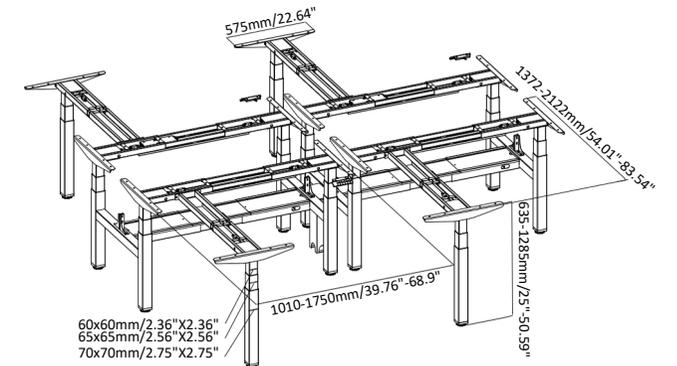

NT33-OB-12BF3

Height Range

635-1285mm

Speed

40mm/s

Stroke

650mm

Width Range


1010-1750mm/  
1372-2122mm

Load Capacity

150kg/position

Voltage


100V-240V

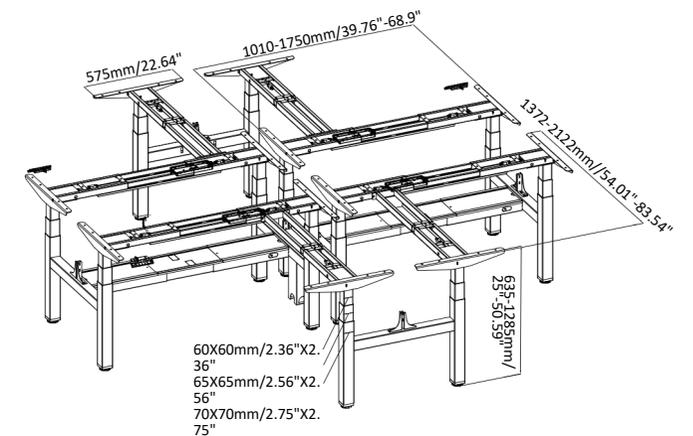



# Economy Line

2-legs / 2-stage

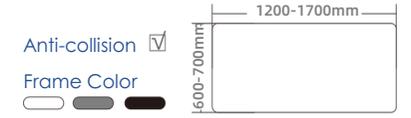

Shape	
Size(mm)	60x60
Standard Column	NT33-2UF2
Height Range(mm)	700-1200
Width Range(mm)	960-1500
Speed(mm/s)	30
Load Capacity(kg)	100
Electric Control	Economic control system

Shape	
Size(mm)	60x60
Reversed Column	NT33-2URF2
Height Range(mm)	700-1200
Width Range(mm)	960-1500
Speed(mm/s)	30
Load Capacity(kg)	100
Electric Control	Economic control system

NT33-2URF2



D5 motor housing

Height Range  
700-1200mm


Width Range  
960-1500mm

Speed  
30mm/s

Load Capacity  
100kg

Stroke  
500mm

Voltage  
100V-240V

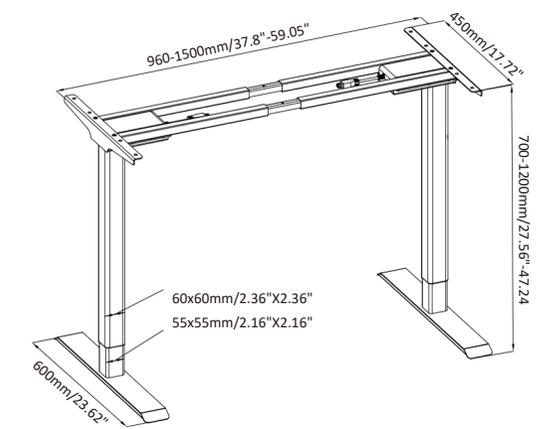

# Economy Line

2-legs / 2-stage




Shape	
Size(mm)	80x50
Standard Column	NT33-2AF2
Height Range(mm)	700-1200
Width Range(mm)	960-1500
Speed(mm/s)	30
Load Capacity(kg)	100
Electric Control	Economic control system

Shape	
Size(mm)	80x50
Reversed Column	NT33-2JRF2
Height Range(mm)	700-1200
Width Range(mm)	960-1500
Speed(mm/s)	30
Load Capacity(kg)	100
Electric Control	Economic control system

# Economy Line

2-legs / 2-stage

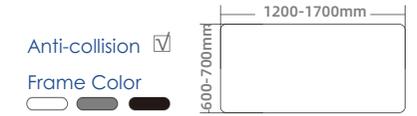

Shape	
Size(mm)	80x50
Standard Column	NT33-2AF2
Height Range(mm)	700-1200
Width Range(mm)	1010-1750
Speed(mm/s)	30
Load Capacity(kg)	100
Electric Control	Economic control system

Shape	
Size(mm)	80x50
Reversed Column	NT33-2JRF2
Height Range(mm)	700-1200
Width Range(mm)	1010-1750
Speed(mm/s)	30
Load Capacity(kg)	100
Electric Control	Economic control system

NT33-2JRF2



Height Range

700-1200mm

Width Range

960-1500mm

Speed

30mm/s

Load Capacity

100kg

Stroke

500mm

Voltage

100V-240V

NT33-2AF2

Height Range

700-1200mm

Width Range

1010-1750mm

Speed

30mm/s

Load Capacity



100kg

Stroke

500mm

Voltage

100V-240V

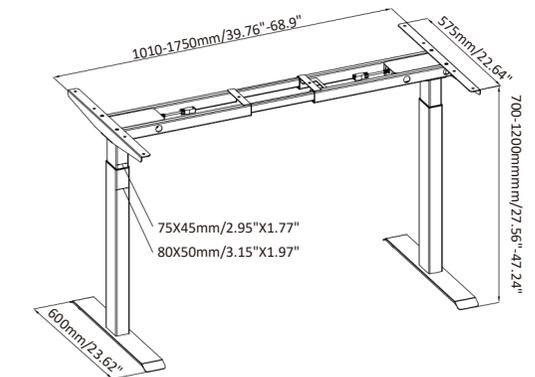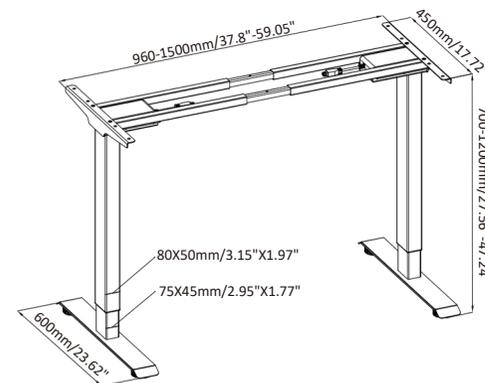

# Economy Line

2-legs / 3-stage



Shape	
Size(mm)	80x50
Standard Column	NT33-2AF3
Height Range(mm)	600-1250
Width Range(mm)	960-1500
Speed(mm/s)	30
Load Capacity(kg)	120
Electric Control	Economic control system

Shape	
Size(mm)	80x50
Reversed Column	NT33-2JRF3
Height Range(mm)	600-1250
Width Range(mm)	960-1500
Speed(mm/s)	30
Load Capacity(kg)	120
Electric Control	Economic control system

# Economy Line

2-legs / 3-stage



Shape	
Size(mm)	80x50
Standard Column	NT33-2AF3
Height Range(mm)	600-1250
Width Range(mm)	1010-1750
Speed(mm/s)	30
Load Capacity(kg)	120
Electric Control	Economic control system

Shape	
Size(mm)	80x50
Reversed Column	NT33-2JRF3
Height Range(mm)	600-1250
Width Range(mm)	1010-1750
Speed(mm/s)	30
Load Capacity(kg)	120
Electric Control	Economic control system

NT33-2JRF3

Height Range  
600-1250mm

Speed  
30mm/s


Stroke  
650mm



Width Range  
960-1500mm

Load Capacity  
120kg

Voltage  
100V-240V

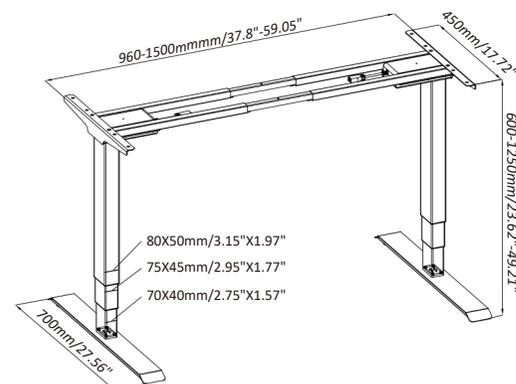

NT33-2AF3

Height Range  
600-1250mm


Speed  
30mm/s

Stroke  
650mm

Width Range  
1010-1750mm


Load Capacity  
120kg

Voltage  
100V-240V

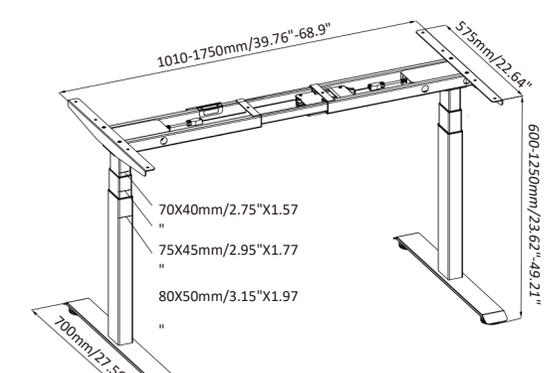

# Economy Line

2-legs / 2-stage / Brushless Motor

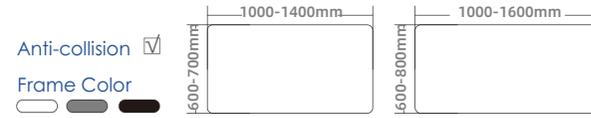

NT33-2SACRF2

Height Range

695-1135mm

Width Range

934-1254mm

Speed

22mm/s

Stroke


440mm

Load Capacity

70kg


Voltage

100V-240V

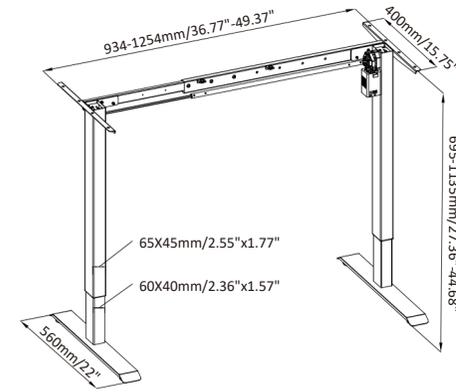

# Economy Line

2-legs / 2-stage / Single Motor

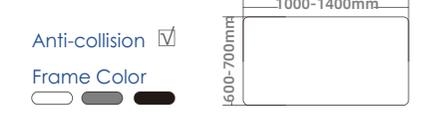


NT33-2SURF2

Height Range

700-1140mm

Width Range

945-1265mm

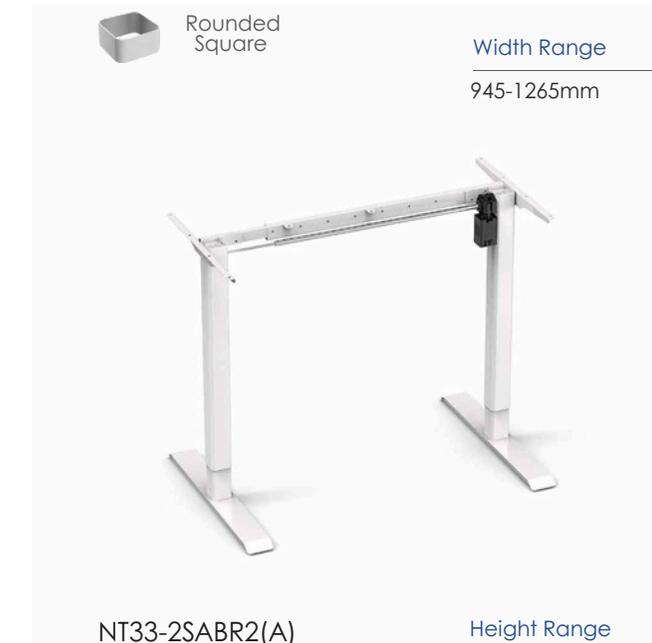

Speed

20mm/s

Stroke


440mm

Load Capacity

70kg

Voltage

100V-240V

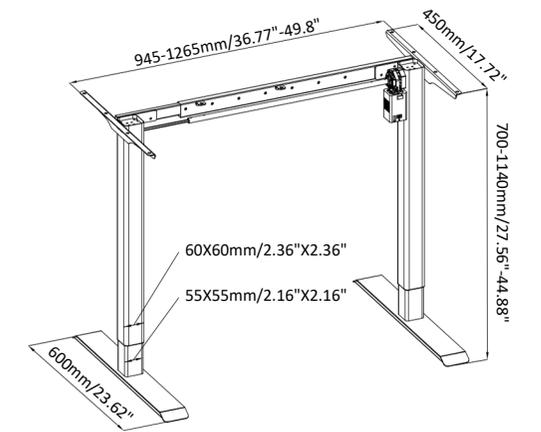

NT33-2SBCF2(D)

Height Range

715-1195mm

Width Range

990-1400mm



Speed

38mm/s

Stroke


480mm

Load Capacity

80kg

Voltage

100V-240V

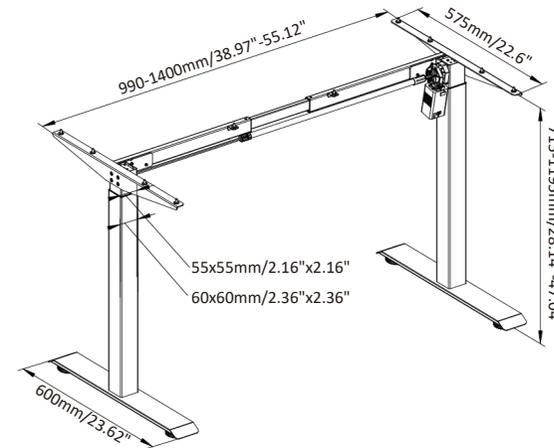

NT33-2SABR2(A)

Height Range

700-1140mm

Width Range

985-1400mm



Speed

20mm/s

Stroke


440mm

Load Capacity

80kg

Voltage


100V-240V

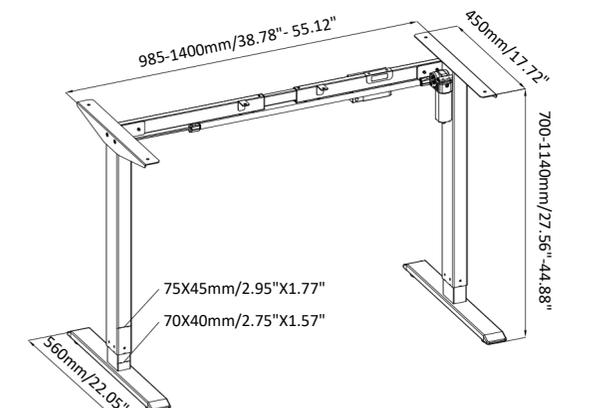

# Economy Line

2-legs / 2-stage / Single Motor

- Anti-collision
- Frame Color

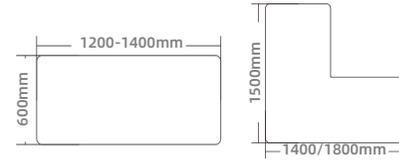

## NT33-2SACRHF2(A)

Height Range

690-1150mm

Speed

20mm/s

Stroke

460mm

Width Range

1104-1300mm

Load Capacity


70kg

Voltage

100V-240V



Double rod structure is more robust to use

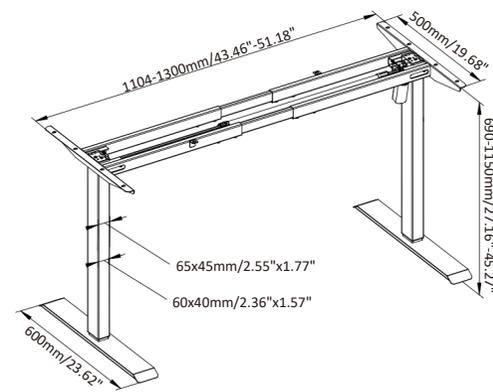

## NT33-3SABRH2

Height Range

690-1150mm

Speed

20mm/s

Stroke

460mm

Width Range

1045-1400mm/  
1125mm

Load Capacity


80kg

Voltage

100V-240V



Double rod structure is more robust to use

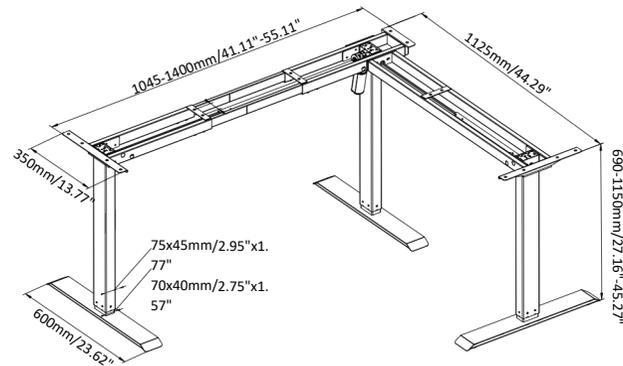

# Double-decker Desk

2-legs / 2-stage

NT33-HT-2SABR2(A)

Single Motor

Height Range

700-1180mm

Top Size

1400x700mm

Speed

20mm/s

Load Capacity

70kg

Stroke



480mm

Voltage

100V-240V

Anti-collision

Frame Color

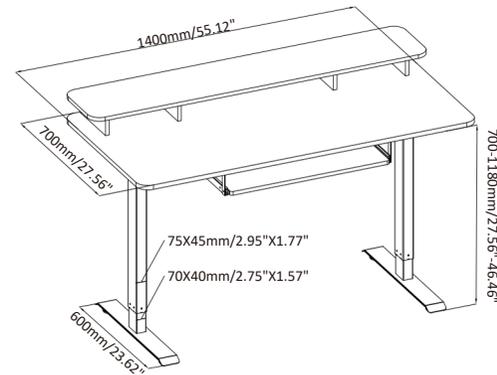

NT33-HT-2JRF2(A)

Dual-motor

Height Range

700-1200mm

Top Size

1400x700mm

Speed

30mm/s

Load Capacity

100kg

Stroke


500mm

Voltage

100V-240V

Anti-collision

Frame Color

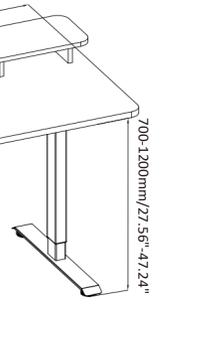

# Gaming Desk

2-legs / 2-stage



Anti-collision

Frame Color



NT33-GD-2SBAF2

APP controls color conversion  
LED Atmosphere Light

Height Range

710-1150mm

Width Range

1000-1600mm

Speed

20mm/s

Load Capacity


70kg

Stroke

440mm

Voltage

100V-240V

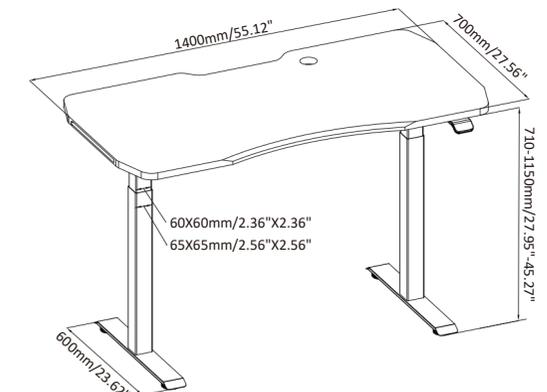

# Table For kids

2-legs



NT33-KD-2SAB2(E)

Height Range

705-1205mm

Top Size

1000x500mm

Speed

20mm/s

Stroke


500mm

Load Capacity

80kg


Voltage

100V-240V

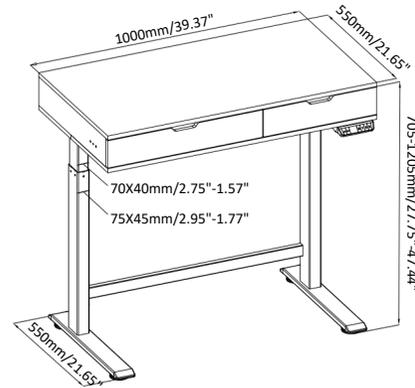

# Table For kids

2-legs / 2-stage

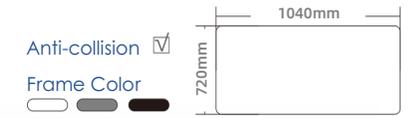

NT33-KD-2SAB2(C)

Height Range

725-1150mm

Top Size

1040x720mm

Speed

20mm/s

Stroke

425mm

Load Capacity

50kg

Voltage

100V-240V



NT33-KD-2AR3

Height Range

385-715mm

Width Range

810-1300mm

Speed

40mm/s

Stroke



330mm

Load Capacity

120kg


Voltage

100V-240V

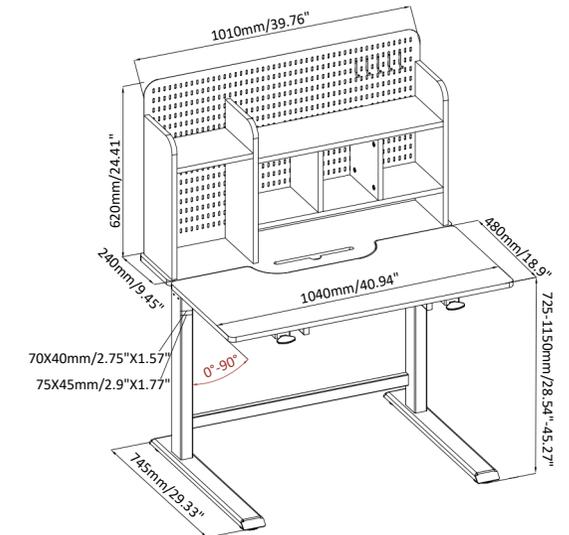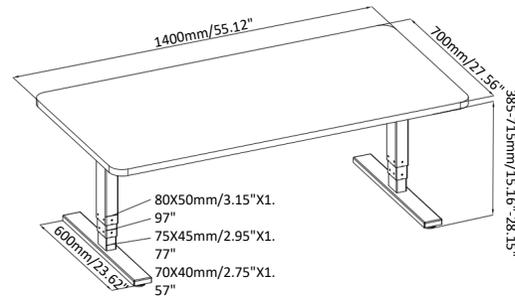

# Glass Table

2-legs / 2-stage

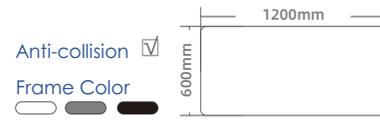

## NT33-E4-2JRF2(A)

Type-A\*1 (18W)

### Height Range

700-1200mm

### Top Size

1200x600mm

### Speed

30mm/s

### Load Capacity


80kg

### Stroke

500mm

### Voltage

100V-240V

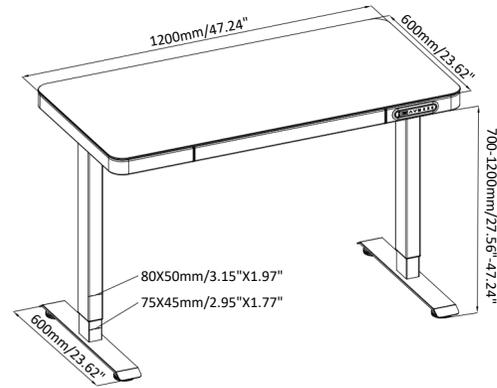

# Wooden Table

2-legs / 2-stage



## NT33-E4(A)Pro-2SABF2(A)

(+) Wireless Charging\*1 (10W)  
Brushless single motor

### Height Range

710-1150mm

### Top Size

1200x600mm

### Speed

20mm/s

### Load Capacity


70kg

### Stroke

440mm

### Voltage

100V-240V

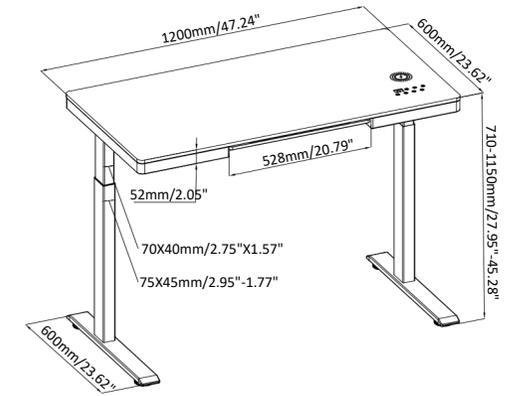

## NT33-E4(A)Pro-2JRF2(A)

(+) Wireless Charging\*1 (10W)  
Type-C\*1 (18W)  
Type-A\*2 (18W)

### Height Range

700-1200mm

### Top Size

1200x600mm  
1400x700mm

### Speed

30mm/s

### Load Capacity


80kg

### Stroke

500mm

### Voltage

100V-240V

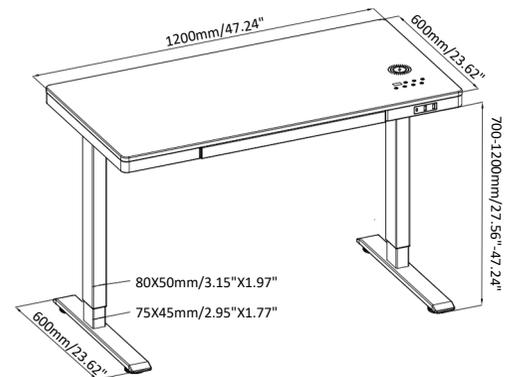

## NT33-E4Pro-2JRF2(A)

(+) Wireless Charging\*1 (10W)  
Type-C\*1 (18W)  
Type-A\*2 (18W)

### Height Range

700-1200mm

### Top Size

1200x600mm

### Speed

30mm/s

### Load Capacity


80kg

### Stroke

500mm

### Voltage

100V-240V

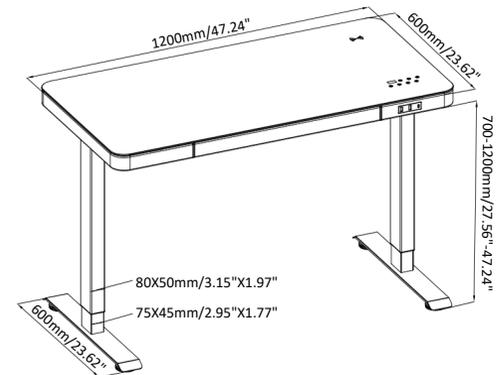

# Dining Table



## NT33-CZ-4SBERF2-C

Two motors

### Height Range

700-1180mm

### Width Range

1500mm

### Speed

20mm/s

### Load Capacity


100kg

### Stroke

480mm

### Voltage

100V-240V

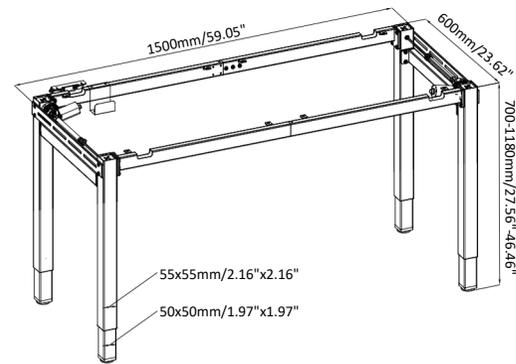

# Dining Table



## NT33-CZ-4DBRF2-A

Four motors

### Height Range

700-1150mm

### Width Range

1800mm

### Speed

30mm/s

### Load Capacity


100kg

### Stroke

450mm

### Voltage

100V-240V

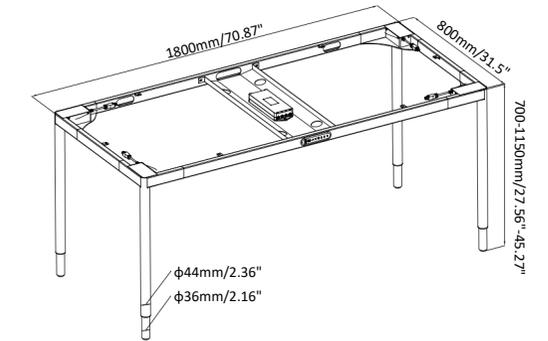

## NT33-CZ-4SBARF2

Two motors

### Height Range

710-1150mm

### Width Range

1100-1700mm

### Speed

20mm/s

### Load Capacity


100kg

### Stroke

440mm

### Voltage

100V-240V

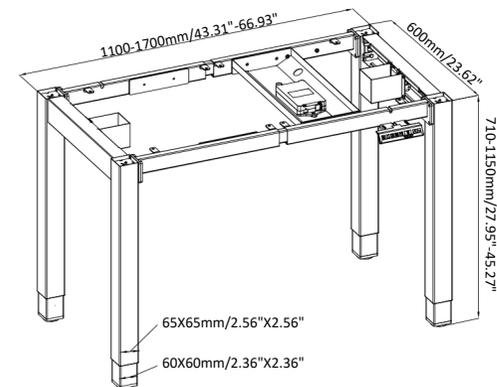

## NT33-CZ-SBF3-A

Two motors

### Height Range

600-1250mm

### Width Range

1055-1595mm

### Speed

25mm/s

### Load Capacity


150kg

### Stroke

650mm

### Voltage

100V-240V

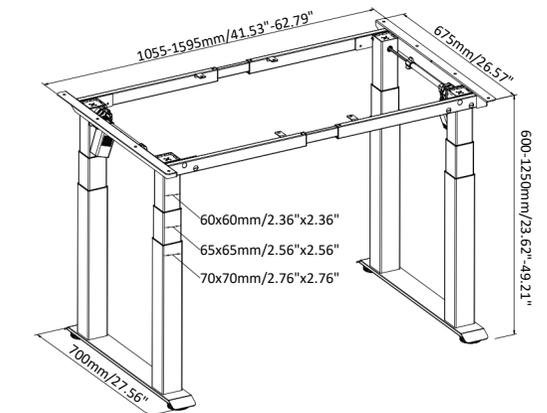

# TV Stand

NT33-1XZTV

Height Range

935-1585mm

Suitable TV Size

32"-75"

Speed

40mm/s

Load Capacity


50kg

Stroke

650mm

Voltage

100V-240V

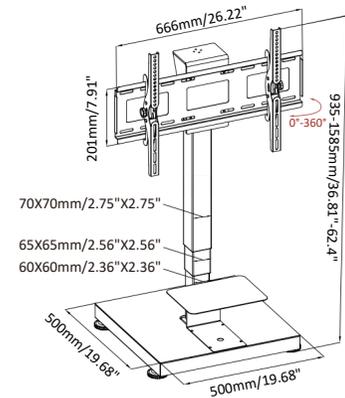

# TV Stand

NT33-1TV

Height Range

855-1815mm

Suitable TV Size

32"-75"

Speed

30mm/s

Load Capacity


70kg

Stroke

960mm

Voltage

100V-240V

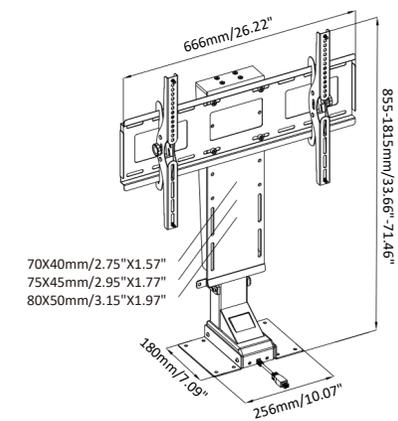

NT33-1YDTV

Height Range

730-1690mm

Suitable TV Size

32"-75"

Speed

30mm/s

Load Capacity


80kg

Stroke

960mm

Voltage

100V-240V

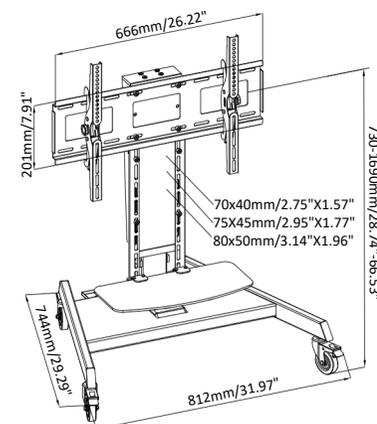

NT33-2YDTV

Height Range

1100-1730mm

Suitable TV Size

50"-85"

Speed

20mm/s

Load Capacity


70kg

Stroke

650mm

Voltage

100V-240V

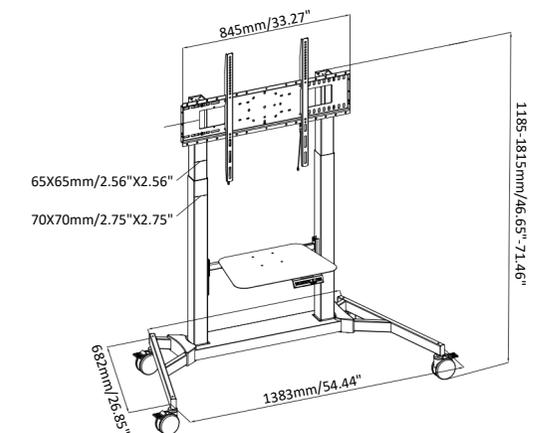

# Flip Table

Dual Motors / 3-stage


NT33-T4-2AF3

Height Range

600-1250mm

Top Size

1200x770mm

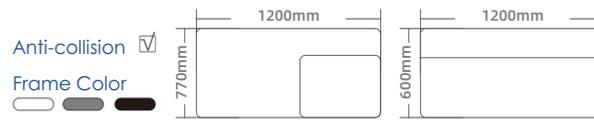

Speed

40mm/s

Stroke


650mm

Load Capacity

120kg

Voltage

100V-240V

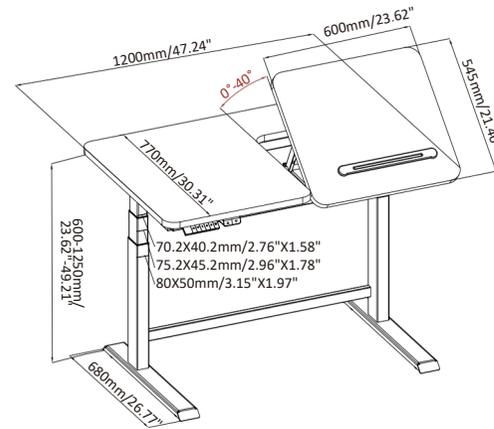

NT33-T6-2AF3

Height Range

600-1250mm

Top Size

1200x600mm

Speed

40mm/s

Stroke


650mm

Load Capacity

120kg

Voltage

100V-240V

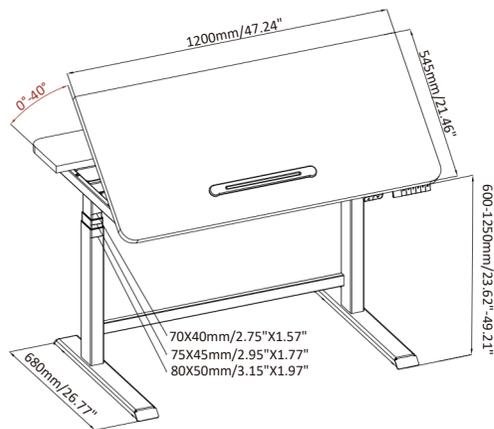

NT33-T9-2AF3

**NEW!**

Height Range

600-1250mm

Width Range

1010-1750mm

Speed

40mm/s

Load Capacity


120kg

Stroke

650mm

Voltage

100V-240V

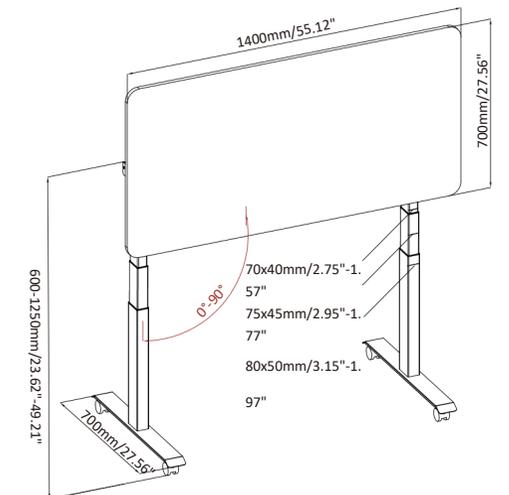

# Podium

Single Motor



Height Range

770-1050mm

Speed

30mm/s

Stroke

280mm

Top Size

770x530mm


Load Capacity

50kg

Voltage

100V-240V


NT33-E8-1BF2A

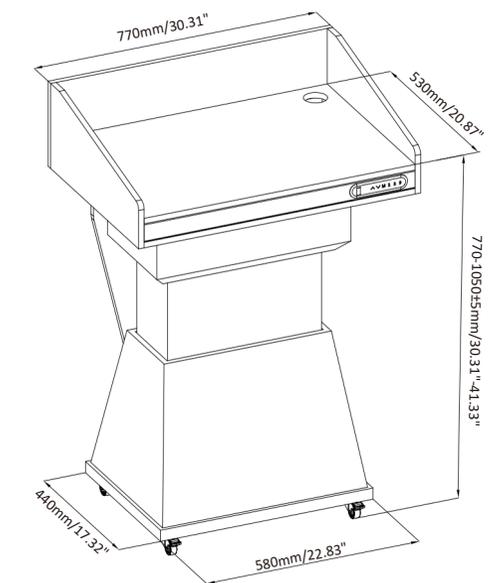

# Manual Table

Hand Crank / 2-stage

Frame Color

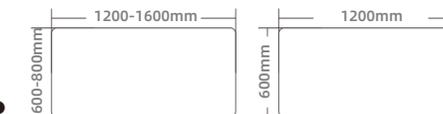

NT33-2M2(B)

Height Range

710-1160mm

Width Range

980-1400mm

Speed


10mm/circle

Stroke

450mm

Load Capacity

80kg

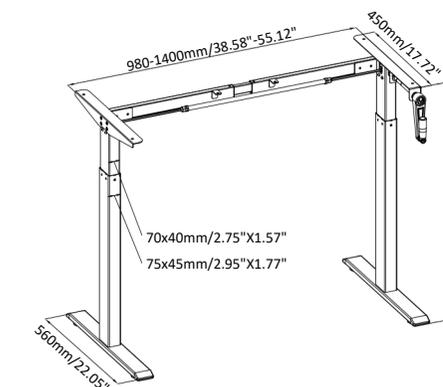

NT33-2MR2

Height Range

700-1150mm

Width Range

910mm

Speed


10mm/circle

Stroke

450mm

Load Capacity

80kg

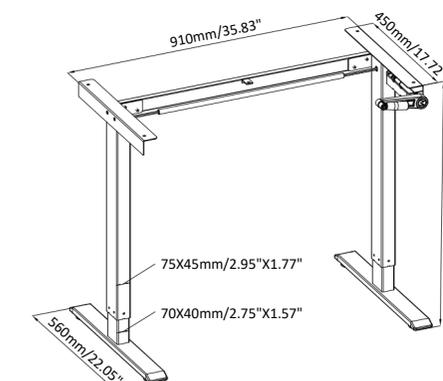

# Manual Table

Hand Crank / 2-stage



NT33-2MBF2(D)

Height Range

705-1155mm

Speed

10mm/circle

Stroke


450mm

Width Range

990-1600mm

Load Capacity

80kg

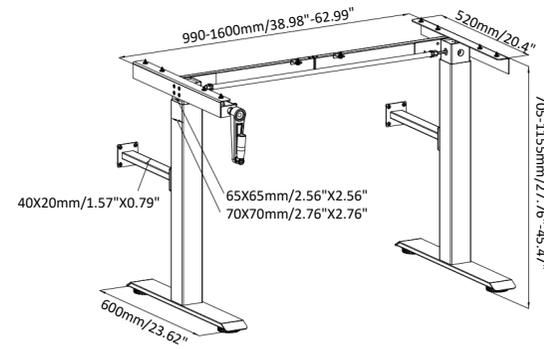

NT33-2MBF2(D)

Height Range

705-1155mm

Speed

10mm/circle

Stroke


450mm

Width Range

990-1600mm

Load Capacity

80kg

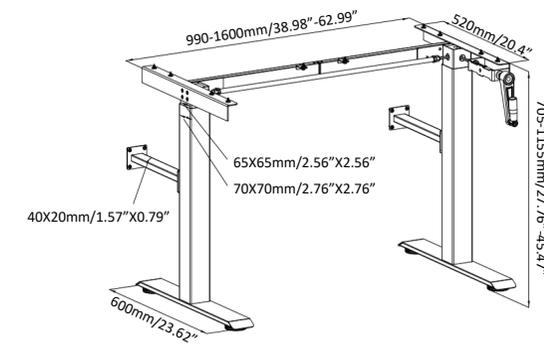

# Manual Table

Hand Crank / 2-stage



NT33-3MH2(H)

Height Range

710-1160mm

Speed

10mm/circle

Stroke


450mm

Width Range

1320-2160mm/  
1145-1985mm

Load Capacity

80kg

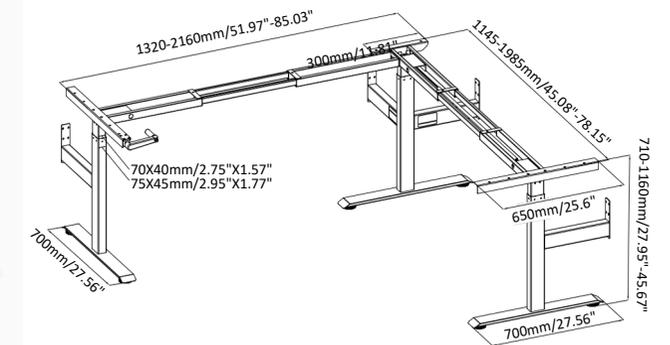

NT33-3MH2(I)

Height Range

710-1160mm

Speed

10mm/circle

Stroke


450mm

Width Range

1145-1985mm

Load Capacity

80kg

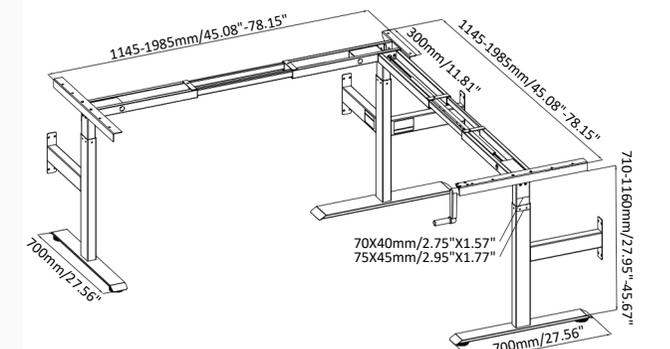

# Fixed Height Table

Gaming Table Series



NT33-2G56

Height Range

705mm




Width Range


1130mm

Load Capacity

80kg

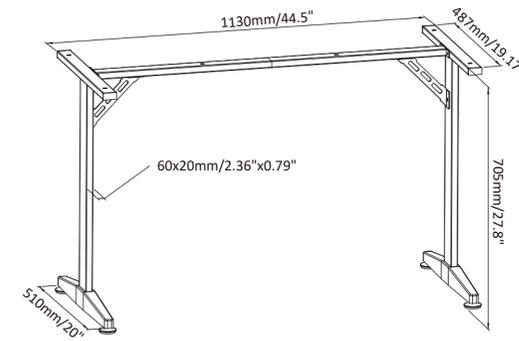

# Fixed Height Table

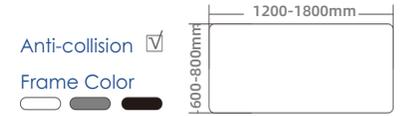

NT33-2G19-KZB

Height Range

695mm




Width Range

1010-1700mm

Load Capacity

100kg

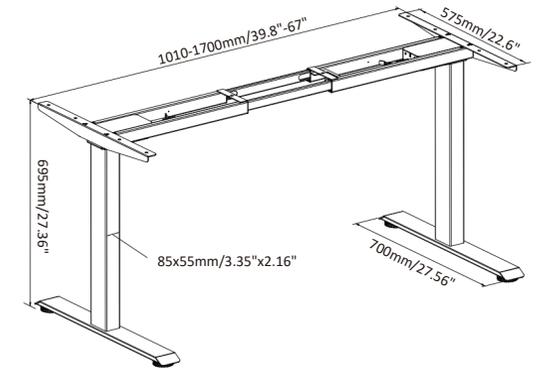

NT33-2G57

Height Range

705mm




Width Range

1130mm

Load Capacity

80kg

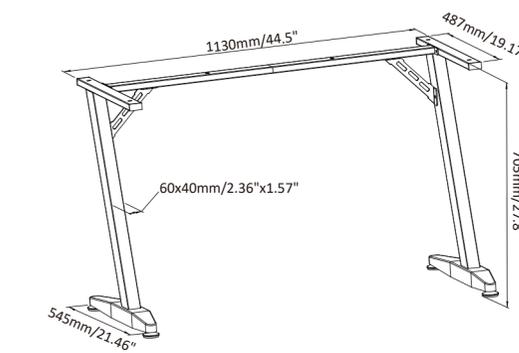

NT33-2G20-KZB

Height Range

695mm




Width Range

1010-1700mm

Load Capacity

100kg

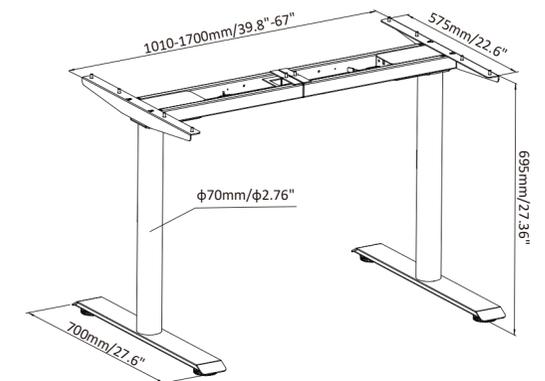



# Fixed Height Table



NT33-2G45

Height Range


770mm

Width Range

1300mm

Load Capacity

120kg

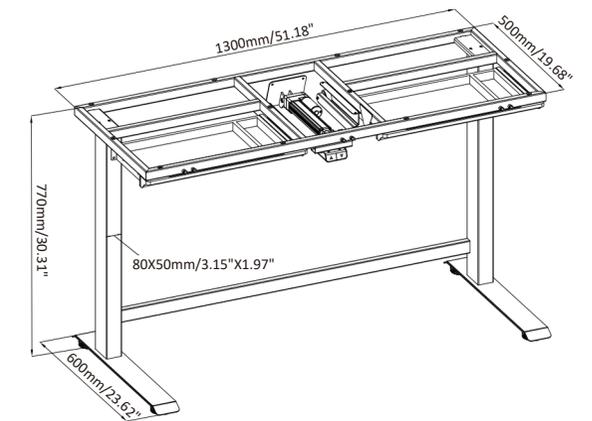

NT33-4G38

Height Range


725mm

Width Range

1100-1700mm

Load Capacity

120kg

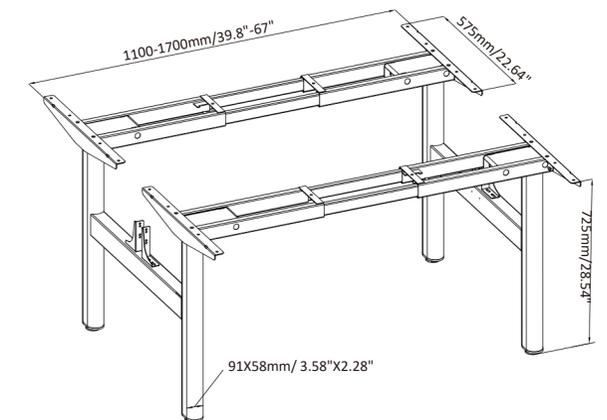

# LIFT COLUMNS

Core Drive Unit  
Diverse Performance  
Adapt to multiple scenarios  
Excellence Design

## New Columns



RKF2 **NEW**


LoadCapacity  
600N

Stroke  
500mm

Height  
665-1165mm

Standard

Speed  
30mm/s



NF2 **NEW**


LoadCapacity  
1500N

Stroke  
455mm

Height  
695-1150mm

Standard

Speed  
8mm/s



HF3A PRO **NEW**


LoadCapacity  
800N

Stroke  
650mm

Height  
565-1215mm

Standard

Speed  
80mm/s



BF4A **NEW**


LoadCapacity  
600N

Stroke  
680mm

Height  
460-1140mm

Standard

Speed  
50mm/s



URF2 **NEW**

LoadCapacity  
800N

Stroke  
500mm

Height  
665-1165mm

Reverse

Speed  
30mm/s




# 2-stage Columns




**AF2**

LoadCapacity	Stroke	Height	Speed	Standard
800N	500mm	665-1165mm	30mm/s	




**ARF2**

LoadCapacity	Stroke	Height	Speed	Reverse
800N	500mm	665-1165mm	30mm/s	




**BF2**

LoadCapacity	Stroke	Height	Speed	Standard
800N	500mm	665-1165mm	30mm/s	




**BRF2**

LoadCapacity	Stroke	Height	Speed	Reverse
800N	500mm	665-1165mm	30mm/s	




**CF2**

LoadCapacity	Stroke	Height	Speed	Standard
800N	500mm	665-1165mm	30mm/s	



**CRF2**

LoadCapacity	Stroke	Height	Speed	Reverse
800N	500mm	665-1165mm	30mm/s	




**DF2**

LoadCapacity	Stroke	Height	Speed	Standard
800N	500mm	665-1165mm	30mm/s	




**DRF2**

LoadCapacity	Stroke	Height	Speed	Reverse
800N	500mm	665-1165mm	30mm/s	




**HF2**

LoadCapacity	Stroke	Height	Speed	Standard
800N	500mm	665-1165mm	30mm/s	



**HRF2**

LoadCapacity	Stroke	Height	Speed	Reverse
800N	500mm	665-1165mm	30mm/s	



# 3-stage Columns



**AF3**


LoadCapacity  
800N

Stroke  
650mm

Height  
565-1215mm

Standard

Speed  
40mm/s



**ARF3**


LoadCapacity  
800N

Stroke  
650mm

Height  
565-1215mm

Reverse

Speed  
40mm/s



**BF3**


LoadCapacity  
800N

Stroke  
650mm

Height  
565-1215mm

Standard

Speed  
40mm/s



**BRF3**


LoadCapacity  
800N

Stroke  
650mm

Height  
565-1215mm

Reverse

Speed  
40mm/s



**CF3**


LoadCapacity  
800N

Stroke  
650mm

Height  
600-1250mm

Standard

Speed  
40mm/s



**CRF3**

LoadCapacity  
800N

Stroke  
650mm

Height  
600-1250mm

Reverse

Speed  
40mm/s



**DF3**


LoadCapacity  
800N

Stroke  
650mm

Height  
600-1250mm

Standard

Speed  
40mm/s



**DRF3**


LoadCapacity  
800N

Stroke  
650mm

Height  
600-1250mm

Reverse

Speed  
40mm/s



**FF3**


LoadCapacity  
800N

Stroke  
650mm

Height  
565-1215mm

Standard

Speed  
40mm/s



**HF3A**


LoadCapacity  
800N

Stroke  
650mm

Height  
565-1215mm

Standard

Speed  
40mm/s



# CONTROL BOX

Security protection mechanism  
Powerful compatibility and extensibility



## ADVANCED CONTROL SYSTEM



### NT33-BK

- 2 legs supported
- Energy saving during non-use
- Input: 100-240V 50-60Hz, 5A
- Output: 32Vdc, each 110VA,

- total 220VA
- Duty cycle: 2min ON/18min OFF
- Anti-collision protection sensitivity function
- Worldwide industry certified



### NT33-BC

- 3 legs supported
- Energy saving during non-use
- Input: 100-240V 50-60Hz, 10.5A
- Output: 30Vdc, each 3.5A,

- total 10.5A
- Duty cycle: 2min ON/18min OFF
- Anti-collision protection sensitivity function
- Worldwide industry certified



### NT33-BO

- 4 legs supported
- Energy saving during non-use
- Input: 220-240VAC 50-60Hz, 5A
- Output: 30Vdc, each 3A,

- total 12A
- Duty cycle: 2min ON/18min OFF
- Anti-collision protection sensitivity function
- Worldwide industry certified

## ECONOMIC CONTROL SYSTEM



### NT33-BB

- 1 legs supported
- Energy saving during non-use
- Input: 100-240V 50-60Hz, 2.5A
- Output: 24Vdc, each 100VA
- Duty cycle: 2min ON/18min OFF
- Anti-collision protection

- sensitivity function
- Worldwide industry certified



### NT33-BD

- 2 legs supported
- Energy saving during non-use
- Input: 28-32V
- Output: 18-26V
- Duty cycle: 2min ON/18min OFF
- Anti-collision protection

- sensitivity function
- Worldwide industry certified



### NT33-BT

- 2 legs supported
- Energy saving during non-use
- Input: 100-240V 50-60Hz, 5A
- Output: 32Vdc, each 110VA, total 220VA
- Duty cycle: 2min ON/18min OFF
- Anti-collision protection sensitivity function
- Worldwide industry certified

# HANDSETS

Choose The Best Handset Options For Your Frame!

KRX Melbourne offers a variety of easily branded Handsets in different designs with a wide range of functions.

Define your requirement, choose your design, and soon you will be moving further with your new table.

## ADVANCED CONTROL SYSTEM



Reminder

**NT33-H1O** ●

- OLED Screen
- 4 Memory Preset
- Time Reminder
- Type C-quick Charge Optional
- LED colored lights
- Logo On Start Up



Reminder

**NT33-HW1** ○ ● ●

- OLED Screen
- 4 Memory Preset
- Type C-quick Charge
- Time Reminder
- Multiple Languages Available ENG,DE,FR,ES,IT.
- Logo On Start Up



**NT33-HV** ●

- OLED Screen
- UP DOWN Paddle
- 2 Memory Preset
- Type C-quick Charge Optional
- LED Light (Green/Orange/white)
- Time Reminder
- Multiple Languages Available ENG,DE,FR,ES,IT.
- Logo On Start Up



Reminder

**NT33-H1I1** ●

- OLED Screen
- 4 Memory Preset
- Time Reminder
- Type C-quick Charge
- Logo On Start Up



OTA

**NT33-H1D** ●

- OLED Screen
- 2 Memory Preset
- Type C-quick Charge
- LED Light Background
- Logo On Start Up



**NT33-H1K** ●

- OLED Screen
- 4 Memory Preset
- Type C-quick Charge
- Logo On Start Up



Reminder

**NT33-H1J** ○ ● ●

- OLED Screen
- 3 Memory Preset
- Time Reminder
- Type C-quick Charge
- Logo On Start Up



Reminder

**NT33-H1G** ○ ● ● ●

- Digital LED Screen
- 4 Memory Preset
- Time Reminder
- Type C-quick Charge optional



**NT33-H1B** ○ ● ● ●

- Digital LED Screen
- Two Button-UP Down



**NT33-HF** ●

- Two Button-UP Down



**NT33-H1F** ●

- Digital LED Screen
- 4 Memory Preset
- Type C-quick Charge Optional



**NT33-HU** ○ ● ● ● ●

- Digital LED Screen
- 3 Memory Preset
- Type C-quick Charge Optional



# ADVANCED CONTROL SYSTEM



**NT33-HZ** ○ ●

- Digital LED Screen
- 3 Memory Preset
- Time Reminder
- USB+Type C-quick Charge Optional



**NT33-HB** ●

- Digital LED Screen
- 4 Memory Preset
- USB+Type C-quick Charge Optional



**NT33-HH** ●

- Digital LED Screen
- 3 Memory Preset
- USB Port
- Recessed Into Table Top

# ECONOMIC CONTROL SYSTEM



**NT33-BHK** ●

- Handset Integrated
- Digital LED Screen
- 4 Memory Preset
- Type C-quick Charge Optional



**NT33-BHG** ○ ● ●

- Handset Integrated
- Digital LED Screen
- 4 Memory Preset
- Time Reminder
- Type C-quick Charge optional



**NT33-BHH** ○ ● ● ●

- Handset Integrated
- Digital LED Screen
- 3 Memory Preset



**NT33-BHS** ○ ●

- Handset Integrated
- Digital LED Screen
- 3 Memory Preset
- Time Reminder
- Type C-quick Charge optional



**NT33-BHQ** ○ ●

- Handset Integrated
- Digital LED Screen
- 3 Memory Preset
- Time Reminder



**NT33-BHP** ●

- Handset Integrated
- Digital LED Screen
- 3 Memory Preset
- USB Port optional

# SWITCH MODE POWER SUPPLY




**SMPS-W-1.8A**

- Input: 100-240V, 50/60Hz, 2.0A
- Output: 29.0V-1.8A 52.2W
- Global Power Standard Optional



**SMPS-W-1.0A**

- Input: 100-240V, 50/60Hz, 1.5A
- Output: 29.0V-1.0A 29.0W
- Global Power Standard Optional




European Plug



England Plug



USA Plug



Australia Plug



Chinese Plug



**SMPS-P-1.8A**

- Input: 100-240V, 50/60Hz, 1.6A
- Output: 29.0V-1.8A 52.2W



**SMPS-P-2.0A**

- Input: 100-240V, 50/60Hz, 1.5A
- Output: 29.0V-2.0A 58W



**SMPS-P-3.0A**

- Input: 100-240V, 50/60Hz, 2.0A
- Output: 29.0V-3.0A 87W

## Rechargeable Battery



**NT33-Battery-001**

- Rechargeable Li-ion Battery Pack
- Capacity: :25.9V/1800mAh/56.98Wh
- Max Discharged Current:5A
- For mobile applications
- Low battery alarm



**NT33-Battery-002**

- Rechargeable Li-ion Battery Pack
- Capacity: :25.9V/2200mAh/56.98Wh
- Max Discharged Current:5A
- For mobile applications
- Low battery alarm

# FEET

Strong Foundation Support  
Multiple Size Ratio



Bevel type



	FA03B	FA22	FB18	FC04	FR46
<b>DIMENSION</b>	700x75x20mm	600x75x18mm	700x80x18mm	600x80x20mm	560x65x17mm
<b>PLATE THICKNESS</b>	2.5mm/2.5mm	2.5mm/2.0mm	2.5mm/3.0mm	2.5mm/2.5mm	2.0mm/2.0mm
<b>FIT TUBE</b>	Rectangle(80*50)	Rectangle(80*50)	Square	Oval,Round	Rectangle(80*50)
<b>FEATURE</b>	Bevel	Bevel	Bevel	Bevel	Bevel

Thicken type



Round type



	FA85	FC06	FD04
<b>DIMENSION</b>	700x75x22mm	700x85x20mm	680x85x22mm
<b>PLATE THICKNESS</b>	2.5mm/2.0mm	3.0mm/3.0mm	4.0mm/4.0mm
<b>FIT TUBE</b>	Rectangle(85*55,90*60)	Oval	Round
<b>FEATURE</b>	Thick/ Bevel	Round head	Round head

Economic type




	FR30	FA55	FA67
<b>DIMENSION</b>	560x60x20mm	560x60x20mm	600x70x20mm
<b>PLATE THICKNESS</b>	2.0mm	2.0mm	2.0mm
<b>FIT TUBE</b>	Rectangle(80*50)	Rectangle(80*50)	Rectangle(80*50)
<b>FEATURE</b>	Low Cost	Low Cost	Low Cost

**FIT TUBE**




**DIMENSION SCREW THREAD**




# ACCESSORIES

Line Management Scheme

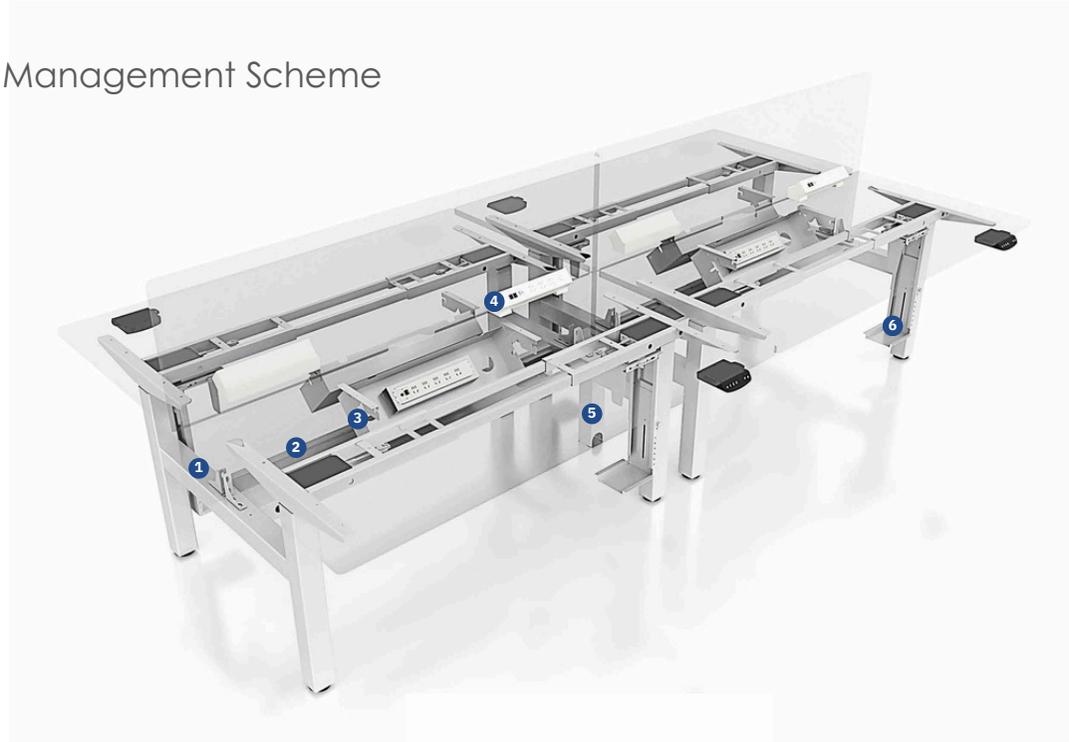

**DRAWER**

Dimension 404x300x37.2mm  
Material Steel  
Colour ● ● ○

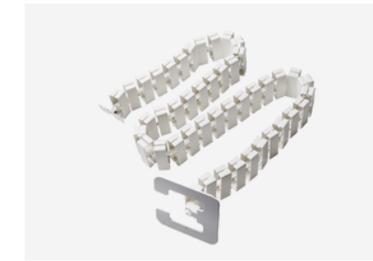

**SERPENTUATOR**

Dimension 110x110x1320mm  
Material Plastic+Steel  
Colour ● ● ○ ●



**HOST BRACKET**

Stretch up and down 300-520mm  
Stretch left and right 138-235mm  
Material Steel  
Colour ● ● ○



**COMPOSITE CLOTH SCREEN**

Dimension1 1200x600x(9+9)mm  
Dimension2 600x600x(9+9)mm  
Material PET/Fabric  
Colour ● ● ○ ● More



**STANDING SCREEN**

Dimension1 1620x600x(14+14)mm  
Dimension2 1800x600x(14+14)mm  
Dimension3 2000x600x(14+14)mm  
Material PET/Fabric+CNC  
Colour ● ● ○ ● More




**WIRING SLOT**

Dimension 650x143x60mm  
Material Flannel  
Colour ● ● ○ ● More



**XCF**

Dimension 890x137x20mm  
Material Steel  
Colour ● ● ○

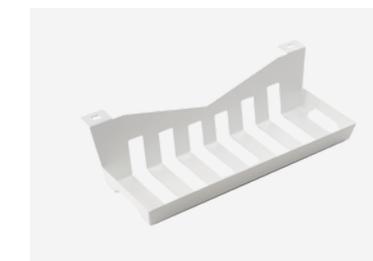

**XC21**

Dimension 320x129.9x78mm  
Material Steel  
Colour ● ● ○



**XC67**

Dimension 635.6x218.9x0.7mm  
Material Steel  
Colour ● ● ○



1 SCREEN CLAMP



2 BAFFLE GROOVE



3 TURN-OVER SLOT



4 CLIP-ON  
DESK SOCKET



5 TOP POST



6 CPU HOLDER



ELECTRIC BOX

# TABLE TOP

## Density Board



WHITE SCRUB



VINTAGE



WHITE MOONLIGHT MATT



LIGHT WOOD GRAIN



WHITE MOONLIGHT MATT



CAIRO WALNUT



SCHATT WALNUT



DEEP WALNUT



BLACK SCRUB




BLACK CARBON FIBER



BLACK WOOD GRAIN

## Shaving Board



WHITE SCRUB



KNOT OAK



COLOR ROBBER



BURLYWOOD



WHITE OAK



BLACK CARBON FIBER



APPLE



YELLOW AMBER



MAPLE



CANYON WALNUT









CHARRING COLOR




BLACK SCRUB

## Size Selection

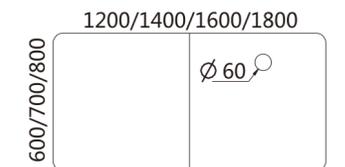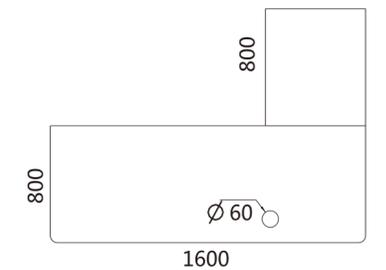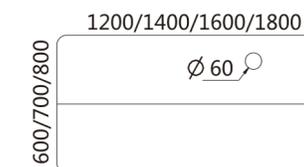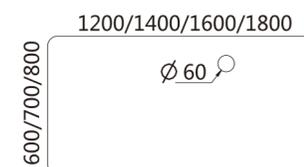

# SUSTAINABLE DEVELOPMENT

## ENVIRONMENTAL SUSTAINABILITY

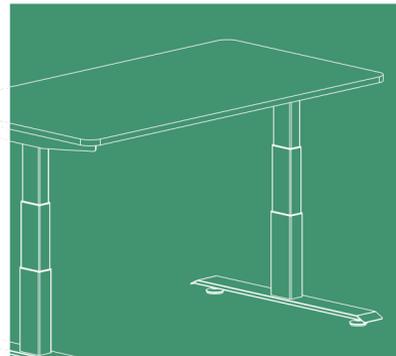

### GREEN FACTORY



The annual clean production audit report is obtained, and the energy low carbon permanent magnet air compressor is adopted, which can save up to 33,000 KWH of electric energy each year.

Uses intelligent production technology, such as digital injection molding, robot welding, precise control of production, efficient and stable, while effectively monitoring energy consumption, greatly reducing resource waste and carbon emissions.



Every year through ISO45001 occupational hazard inspection, through ISO14001 push 6S management, to ensure the safety and cleanliness of the office.



## GREEN PRODUCT



### 20000+

After 10,000 to 20,000 life tests, NATE column has increased durability, reduced replacement frequency, and extended service life.

### 0.1W

NATE controller is reduced to 0.1W standby power, from 1W to 0.1W, which saves 8 KWH per year for a single controller.

### 20%

We adopt brushless motor, the efficiency is improved by 20%, environmental protection and energy saving, and the life is longer.

### Recyclable



Using environmental protection honeycomb packaging, this packaging is both strong and light, effective protection of products, and can be recycled.

### Compliance



Certified by RoHS, REACH and WEEE, which proves the compliance of products in the restriction of hazardous substances, chemical substance assessment and electronic and electrical recycling

HONEYCOMB PACKAGING



DURABILITY TEST



0.1W STANDBY POWER

